


# ENGINEERED FOR SPEED, BUILT FOR COMPLIANCE.



## FastWrap-XLS™ Duct Wrap

High-performance fire-rated duct wrap that's lighter, installs faster, and delivers a clean black finish.

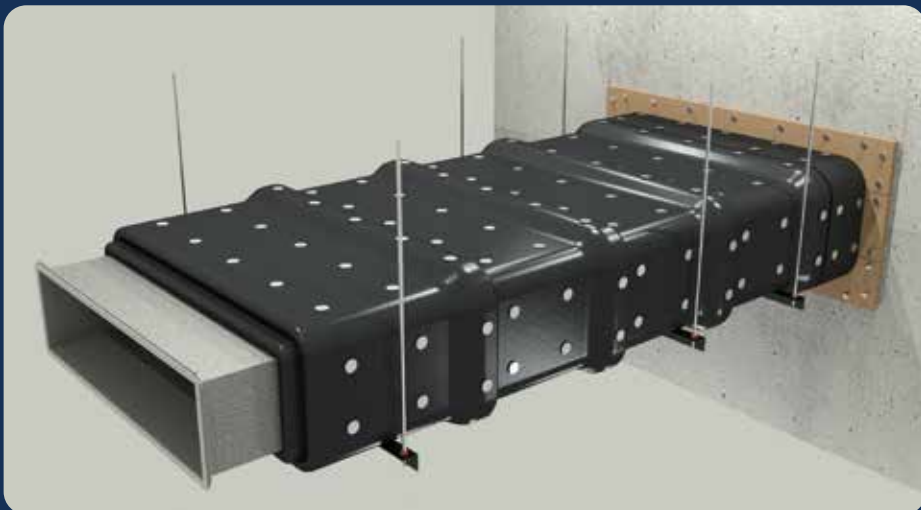

## FastWrap-XLS™

BOSS **FastWrap-XLS™** is an advanced, ultra-lightweight fire-rated duct wrap engineered to deliver high-performance fire protection without slowing down installation. Designed for steel ductwork across HVAC applications, the system provides up to 120 minutes fire resistance while maintaining exceptional thermal insulation performance. Its low bio-persistent fibre core and fully encapsulated black foil outer layer ensure safe handling, durability, and a clean aesthetic finish for exposed services.

Unlike traditional wrap systems, **FastWrap-XLS™** simplifies installation with a no-banding requirement, butt-joint first layer and identical internal and external fire detailing—helping contractors install faster, reduce labour costs and minimise risk on site. With proven compliance to AS1530.4 and AS4072.1, it delivers a practical, high-performance solution for modern construction where speed, compliance and buildability matter.



### Key Benefits

- **Up to FRL 120/120/120 performance**
- **Internal and external fire scenarios** for horizontal and vertical ducts
- **25% lighter than comparable wrap systems** for faster handling and reduced fatigue
- **Ultra-fast installation** with butt-joint first layer and simplified fixing methodology
- **No banding required**, reducing labour time and install complexity
- **Black foil encapsulation** for clean, exposed ceiling aesthetics
- **Moisture, grease and water-resistant outer layer** to maintain long-term insulation performance
- **Low bio-persistent fibre technology** for safer handling on site
- **Consistent install method for internal and external fire**, reducing errors on site
- **Zero clearance to combustibles**, maximising usable space
- **Ducts up to 3.6m x 3.6m** – offering extremely large variability
- **2, 3 & 4 sided wrap configurations** – ideal for tight access
- **Versatile across HVAC applications** – ventilation, smoke extract, kitchen exhaust, pressurisation systems
- **Wide variety of substrates** – plasterboard & shaftliner walls, concrete and masonry walls, AAC and Speedpanel systems, and concrete floor slabs

### Product Codes

**FW-610:** 7.62m L x 38mm H x 610mm W

**FW-1220:** 7.62m L x 38mm H x 1220m W

### Downloads

Scan to download our **Technical Data Sheet** for the **FastWrap-XLS™**.

