
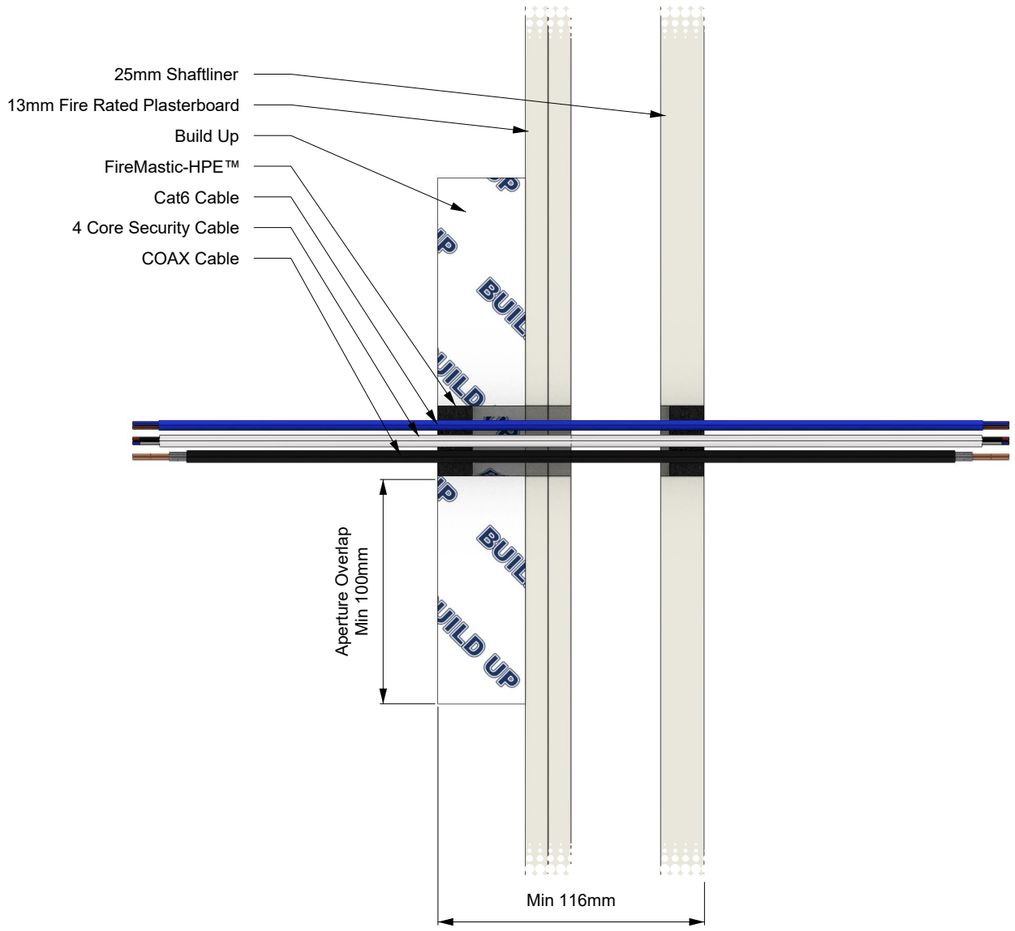


BUILD UP DETAILS

*Localised thickening to be fixed and sealed to substrate using appropriate methods relevant to the substrate and build up material.

*To achieve the necessary thickness and FRL rating of the originally tested substrate, the separating element can be built-up on one or both sides by using BOSS Batts, fire-rated plasterboard, calcium silicate board, or Shaftliner board.

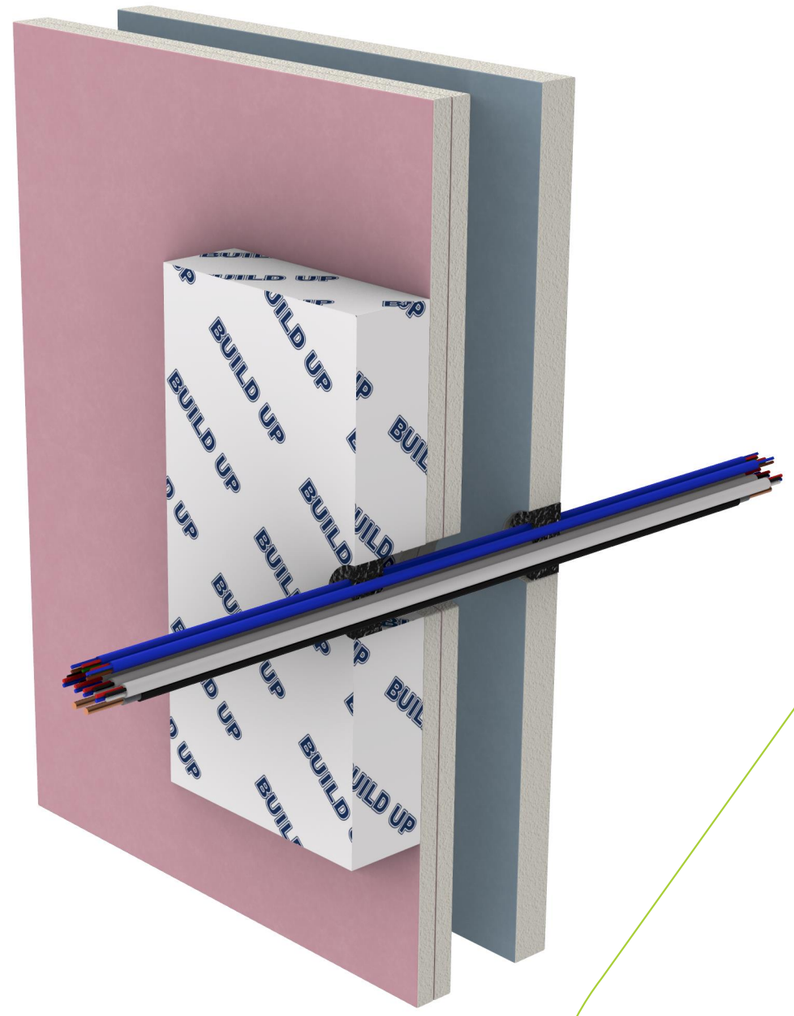

SYSTEM DESCRIPTION	
Orientation:	Wall
Trade / Type:	Electrical
Service:	Mixed Comms Bundle
Substrate:	Shaftliner with Buildup
Min Substrate Thickness (mm):	116
Sealant Depth (mm):	20
Sealant Fillet (mm):	0
Wrap Length (mm):	-
FRL / FRR:	-/120/120

FIRE STOPPING INFORMATION	
BOSS FireMastic-HPE™	-
-	-
-	-
APERTURE (mm)	**ANNULAR GAP (mm)**
40	-
ADDITIONAL INFORMATION	

SERVICE SIZE & DETAILS

Up to 2 x RG6 Coax cables
Up to 2 x CAT6 cables,
Up to 2 x 4 core security security cable (7/0.20mm)
Up to 6 of any type of the above listed cables.
Sealant to a depth of 20 mm in annular gap and finished flush both sides.

SUPPORTING INFORMATION			
Reference Standard:	AS 1530.4:2014		
Supplementary Standard:	AS 4072.1-2005		
Report Reference:	WF FAS 190335		
Drawing Number:	BF-2010.20		
Date:	26/11/24	**Rev:**	01

IMPORTANT: This drawing is provided as a guide only and does not guarentee compliance for every application. Confirm that the supporting certification is applicable to your specific construction details and obtain acceptance from the relevant Certifying Authority before installation. BOSS Passive Fire reserves the right to amend this document without notice.