
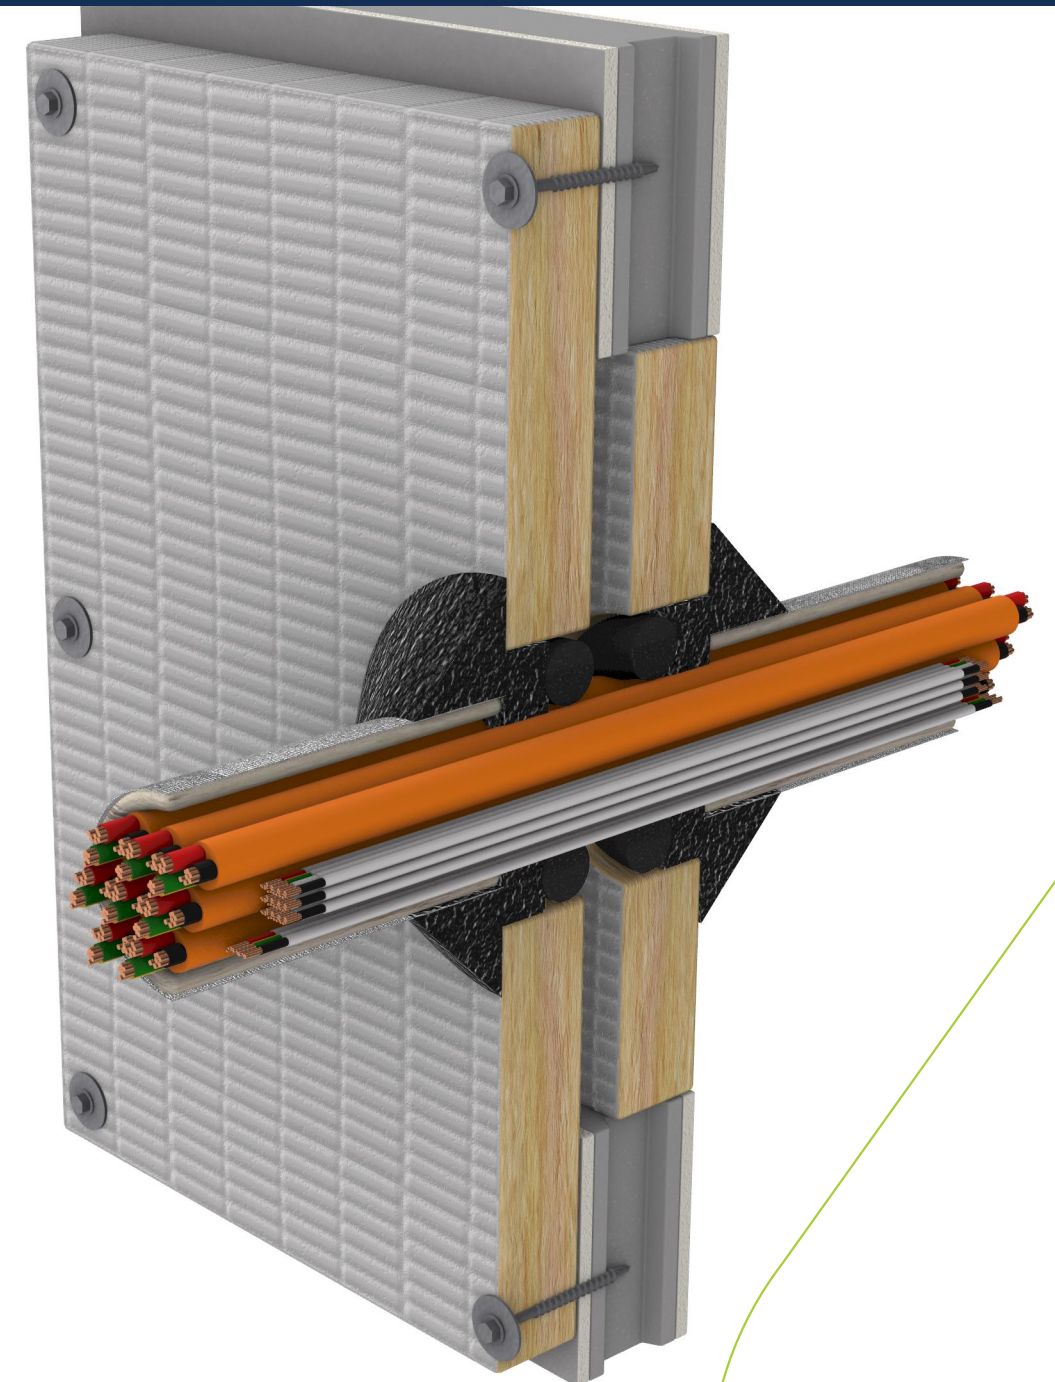


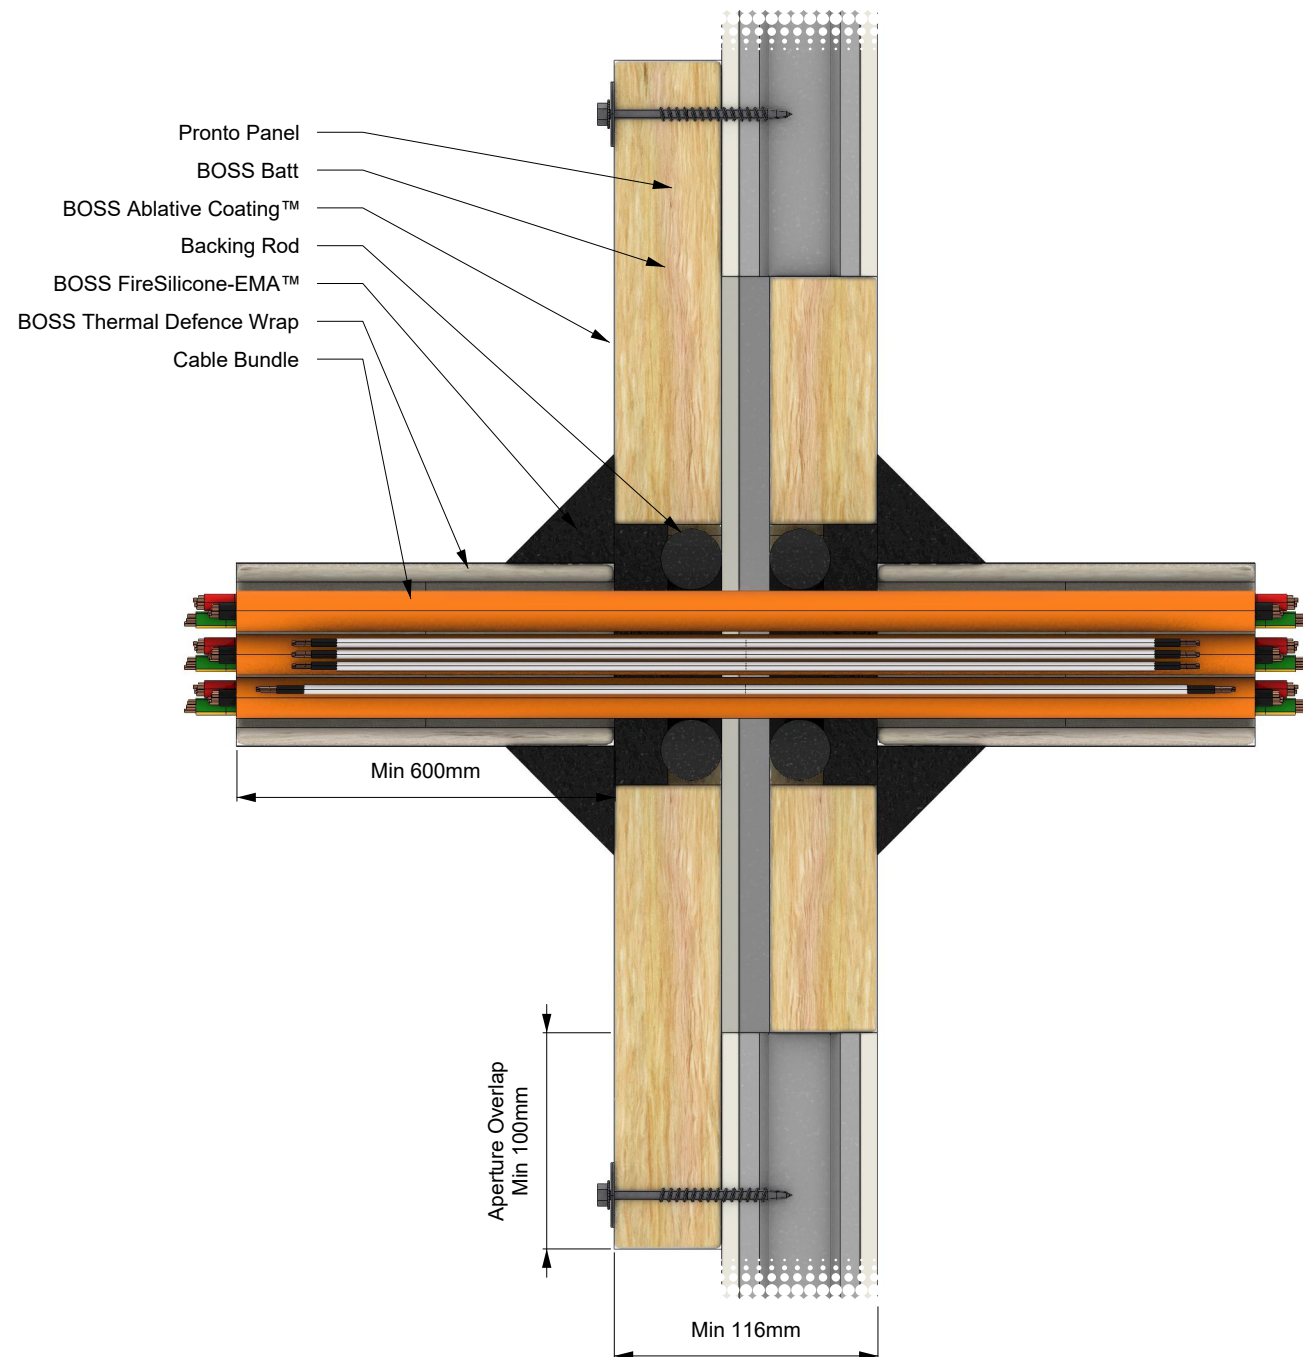

| SYSTEM DESCRIPTION            |                                      | FIRE STOPPING INFORMATION |                      | SERVICE SIZE & DETAILS                                                                                                                                                                                                                                                                                                                                                                                                                        | SUPPORTING INFORMATION  |          |                |    |
|-------------------------------|--------------------------------------|---------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------|----------------|----|
| Orientation:                  | Wall                                 | BOSS Batt™                | BOSS Thermal Defence | Cable bundle<br>-Up to 2.5mm² 2C+E Power Cable<br>-Up to 3 x 6mm² 3C+E Power Cables<br>-Up to 8 x 16mm² 3C+E Power Cables<br>FireSilicone-EMA™ Sealant installed 25mm deep in annular gap. For annular gaps larger than 20mm and up to 50 mm, a mineral wool backing rod must be used to back the applied sealant. The service is to be finished with a 50 mm x 50 mm fillet both sides. 600mm of Thermal Defence Wrap each side of the wall. | Reference Standard:     |          | AS 1530.4:2014 |    |
| Trade / Type:                 | Electrical                           | BOSS Ablative Coating™    | -                    |                                                                                                                                                                                                                                                                                                                                                                                                                                               | Supplementary Standard: |          | AS 4072.1-2005 |    |
| Service:                      | Multi Core / Orange Circular / Mains | BOSS FireSilicone-EMA™    | -                    |                                                                                                                                                                                                                                                                                                                                                                                                                                               | Report Reference:       |          | WF FAS 200332  |    |
| Substrate:                    | Pronto Panel                         | APERTURE (mm)             | ANNULAR GAP (mm)     |                                                                                                                                                                                                                                                                                                                                                                                                                                               | Drawing Number:         |          | BF-2385.8      |    |
| Min Substrate Thickness (mm): | 116                                  | Up to 1100 x 1100         | 20 - 50              |                                                                                                                                                                                                                                                                                                                                                                                                                                               | Date:                   | 10/04/25 | Rev:           | 01 |
| Sealant Depth (mm):           | 25                                   | ADDITIONAL INFORMATION    |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |          |                |    |
| Sealant Fillet (mm):          | 50                                   | -                         |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |          |                |    |
| Wrap Length (mm):             | 600                                  |                           |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |          |                |    |
| FRL / FRR:                    | -/120/120                            |                           |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |          |                |    |

IMPORTANT: This drawing is provided as a guide only and does not guarantee compliance for every application. Confirm that the supporting certification is applicable to your specific construction details and obtain acceptance from the relevant Certifying Authority before installation. BOSS Passive Fire reserves the right to amend this document without notice.