
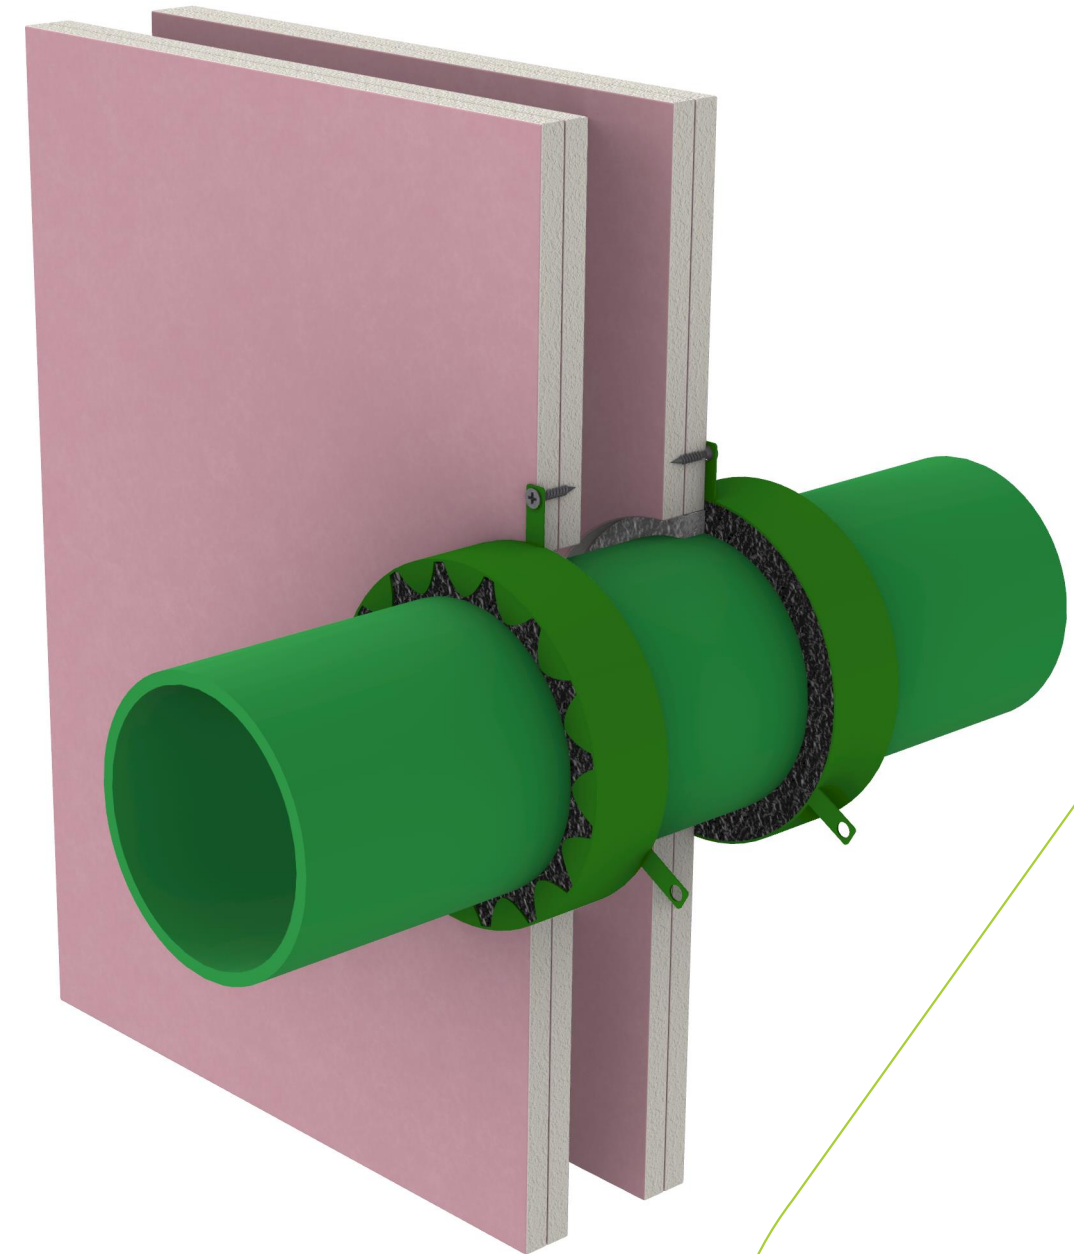


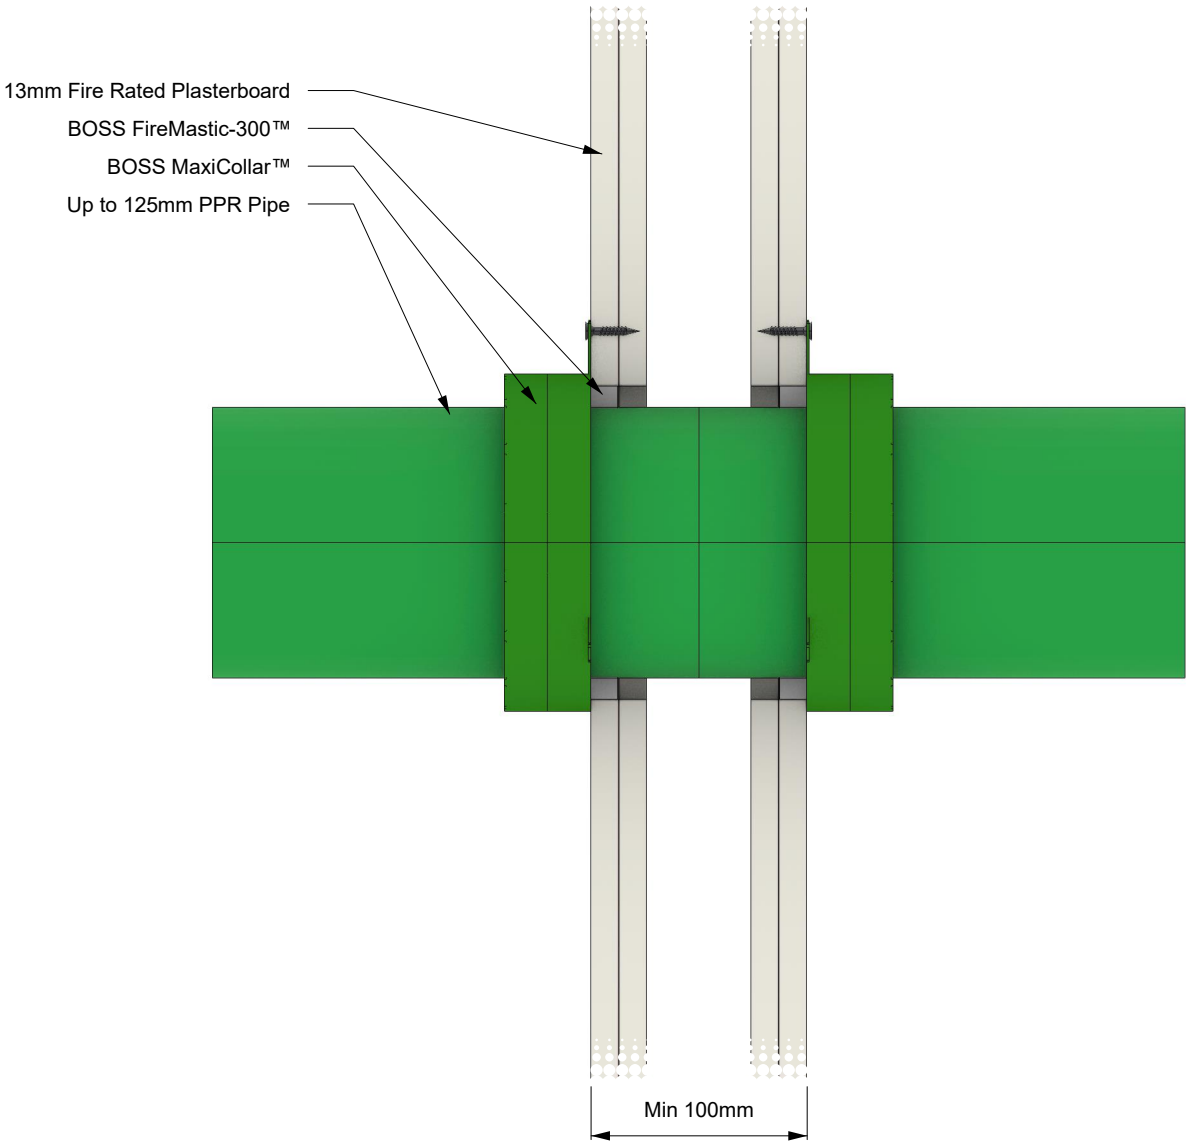

| SYSTEM DESCRIPTION            |                                             | FIRE STOPPING INFORMATION |                  | SERVICE SIZE & DETAILS                                                                                                                                             | SUPPORTING INFORMATION  |  |                |         |
|-------------------------------|---------------------------------------------|---------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--|----------------|---------|
| Orientation:                  | Wall                                        | BOSS MaxiCollar™          | -                | Up to 125 mm PPR pipe with 3.1 mm maximum wall thickness. Sealant 12.5 mm deep in 10.0 mm annular gap both sides. 125 mm BOSS MaxiCollar™ installed on both sides. | Reference Standard:     |  | AS 1530.4:2014 |         |
| Trade / Type:                 | Plumbing / Hydraulic / Active Fire          | BOSS FireMastic-300™      | -                |                                                                                                                                                                    | Supplementary Standard: |  | AS 4072.1-2005 |         |
| Service:                      | PPR                                         | -                         | -                |                                                                                                                                                                    | Report Reference:       |  | WF FAS 210203  |         |
| Substrate:                    | Double Layer Fire Rated Plasterboard System | APERTURE (mm)             | ANNULAR GAP (mm) |                                                                                                                                                                    | Drawing Number:         |  | BF-2657.2      |         |
| Min Substrate Thickness (mm): | 100                                         | -                         | 10.0             |                                                                                                                                                                    | Date:                   |  | 04/07/25       | Rev: 01 |
| Sealant Depth (mm):           | 12.5                                        | ADDITIONAL INFORMATION    |                  |                                                                                                                                                                    |                         |  |                |         |
| Sealant Fillet (mm):          | -                                           |                           |                  |                                                                                                                                                                    |                         |  |                |         |
| Wrap Length (mm):             | -                                           |                           |                  |                                                                                                                                                                    |                         |  |                |         |
| FRL / FRR:                    | -/120/120                                   |                           |                  |                                                                                                                                                                    |                         |  |                |         |

IMPORTANT: This drawing is provided as a guide only and does not guarantee compliance for every application. Confirm that the supporting certification is applicable to your specific construction details and obtain acceptance from the relevant Certifying Authority before installation. BOSS Passive Fire reserves the right to amend this document without notice.